
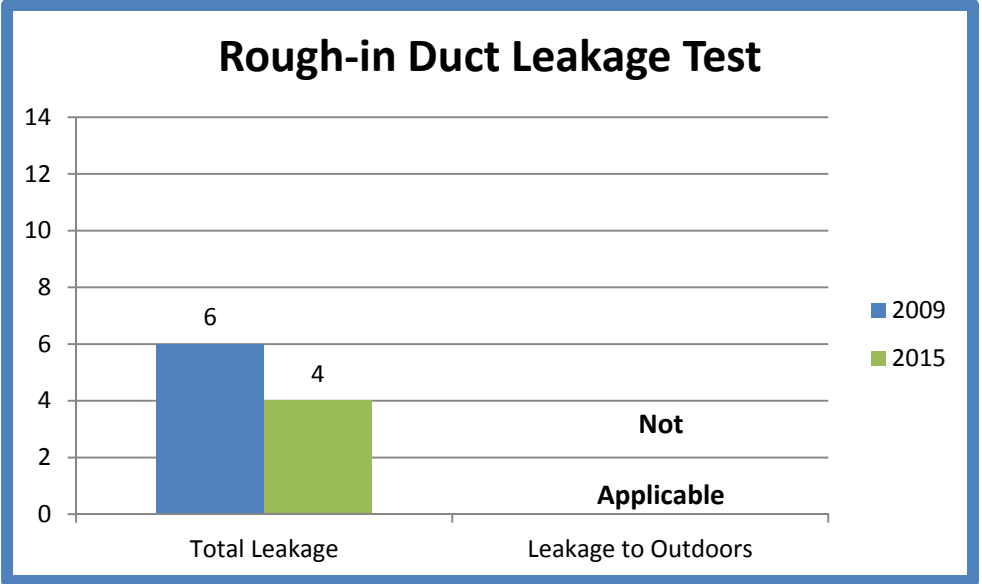


# Newport Ventures

## Duct Leakage Testing

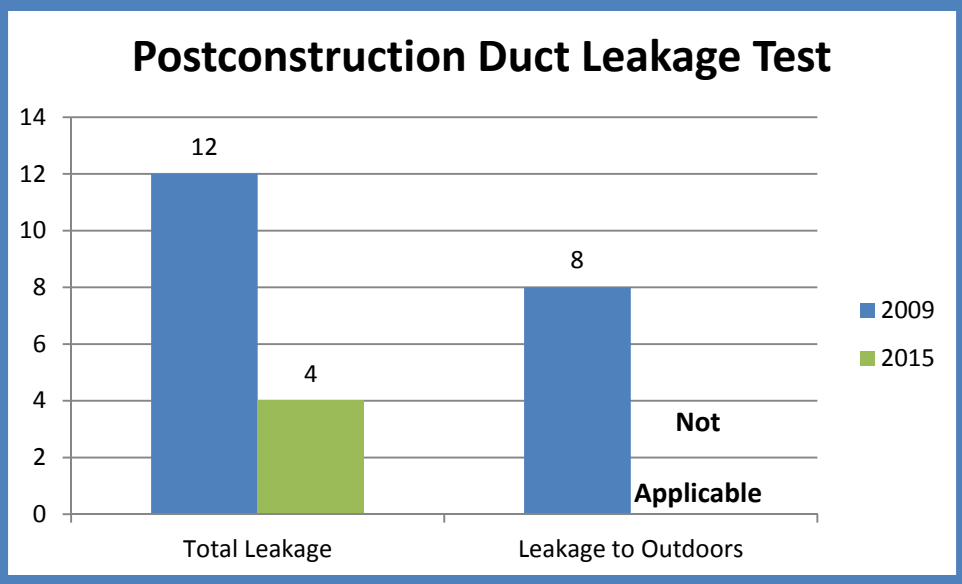

### Measurement

- All Measurements are in CFM/100 ft<sup>2</sup> of Conditioned Floor Area at 25 Pascals Pressure

### Mandatory / Prescriptive

- 2009 - Testing and Leakage Target are Mandatory
- 2015 - Testing is Mandatory; Leakage Target is Prescriptive

### Leakage Type

- Leakage to Outdoors is Only Allowed in 2009 Postconstruction Test
- Total Leakage is the Only Option in 2015

### Exceptions

- Testing Not Required if Ducts and Air Handler are Located Entirely in Conditioned Space